

PERFORM[®]

flexible roof flashing

**MORE
THAN A
SUBSTITUTE
FOR LEAD**

PERFORM – a new generation of flexible roof flashing with the traditional look and feel of lead

- Great for all traditional flashing applications
- Easily cut and dressed with special dresser
- Use 4 metre roll without need for expansion joints.
- No scrap value to potential thieves
- Non-toxic and environmentally friendly
- Ideal for domestic or commercial applications
- 20 year product warranty
- Lightweight and easy to handle
- Available in four different colours
- Will not discolour or stain the roof



Dormer windows, skylights and solar panels

Perform is the ideal solution for flashing dormer windows and any other penetrations through traditional roofs including solar panels or roof lights

Valley gutters

Ideal for valley gutters, the full four metre roll of Perform can be used without the need for expansion joints.

Step flashings

Perfect for flashing all types of structures including conservatories, car ports and extensions.

Chimneys

Great for flashing around traditional chimney stacks on any type of profiled tile or slate roof.

What it is

Perform is a composite consisting of aluminium mesh, embedded in a special type of polymer rubber. Both of these materials are environmentally sound and UV resistant. The material offers the same functionality of lead, has excellent stretching properties and provides a 'breathable' covering which prevents the formation of condensation.

Much lighter than lead and non-toxic, Perform meets all the demands of today's health and safety regulations.

In order to match various different coloured tiles or slates, specifiers can now choose from four different colours; grey, terracotta and black are available from stock with brown to special order.



Now available in colour!

Description	Weight
150mm x 4m roll	2.1kg
250mm x 4m roll	3.6kg
300mm x 4m roll	4.3kg
450mm x 4m roll	6.5kg
1250mm x 4m roll	18.0kg





How it works

Perform can be applied in exactly the same way as lead but causes no unsightly staining, negating the need for patination treatment. It is easily cut with tin snips or

Use the dresser to protect Perform



even strong scissors. Where the material is shaped during application a perform dresser should be used for best results and to

avoid damage to the surface of the product. Alternatively, Perform itself can be formed into an effective dresser.


Perform is compatible with all common building materials such as brick, concrete and PVC and can be joined either by using the lock seam method or glued together with Perform adhesive. If nails or screws are required for installation the product is self-sealing.

To adhere Perform to any porous surface prime the area first with a proprietary PVA primer before using the Perform adhesive.


Perform adhesive in 290ml tubes




Use Perform Xtra Protection paint where water is likely to travel from copper or bitumen onto Perform

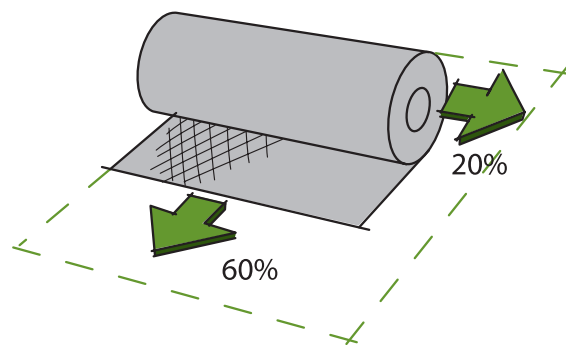

You can either fold up joints...

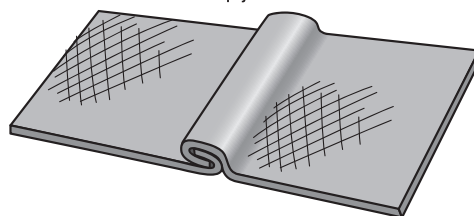

- glue them together with an overlap of 30 mm as a minimum.

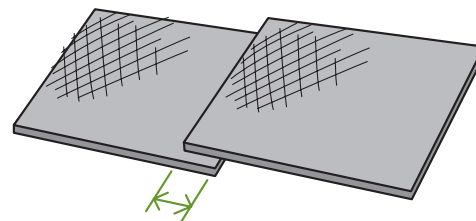

Min. 30 mm



Unit C1 M62 Trading Estate, Larsen Road, Goole, East Yorkshire, DN14 6XF

Tel: 01405 780444

Fax: 01405 780445

Website: www.meir-roofing.co.uk

Email: sales@meir-roofing.co.uk